

Model DWU/DWXU Dominator™ sump, effluent



EBARA

EBARA Fluid Handling

an EBARA International Corporation company

Model DWU/DWXU

Features

- Constructed of high-quality, corrosion resistant 304 stainless steel
- 2" solids handling
- Single and three phase models available
- Motor is 2 pole submersible, rated continuous duty
- Class F motor insulation
- 104°F maximum fluid temperature continuous operation, fully submerged; 140° F intermittent operation
- Automatic and manual operation
- Auto float switch is mechanical/non-mercury
- NPT thread discharge or 150 lb ANSI flange
- Double mechanical seal with viton elastomers
- Shielded, prelubricated ball bearings 50,000 hour
- Single channel and vortex impellers
- Thermal overload protection
- QDC system available as an optional accessory
- Flows to 235 GPM, heads to 74 feet



Applications

- Wastewater with suspended solids
- Residential
- Commercial
- Industrial
- Fountains, water displays
- Containment transfer
- Irrigation
- Drainage
- Emptying (pools, water storage structures)



*Note: The Model DW(A)(F)U, DWX(A)(F)U is listed by the Canadian Standards Association (CSA) as certified (3HP excluded).

DWU, DWXU selection charts

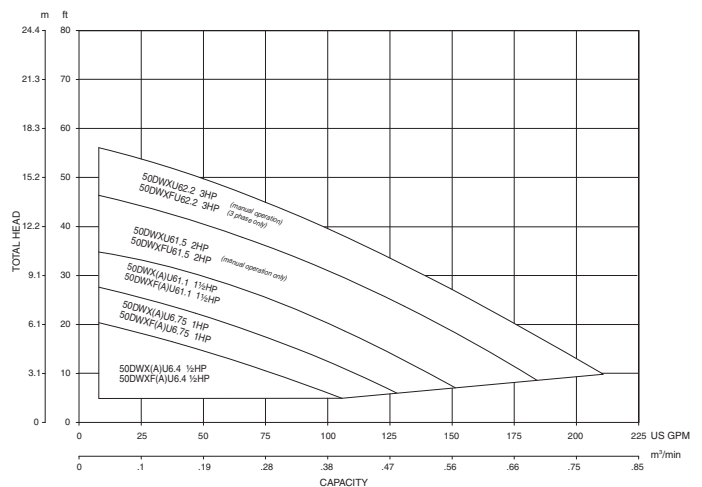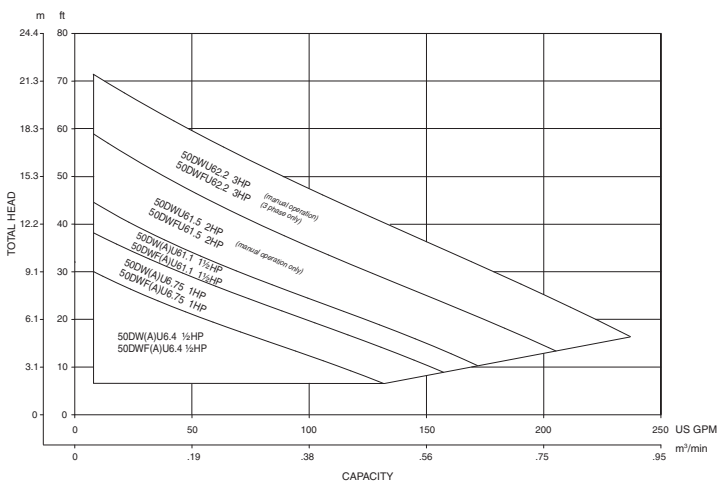

EBARA Fluid Handling

1651 Cedar Line Drive • Rock Hill, SC 29730 • telephone: (803) 327-5005 • fax: (803) 327-5097

www.pumpsebara.com

© 2008 EBARA International Corporation, All rights reserved.

EFHDWU0117